

Armadio Nano Linear Fixture

Specification Submittal

Both on-trend and timeless, our polished Armadio collection is the world's strongest closet rod luminaire. Armadio is easy to install with a three-piece mounting system and hidden screw holes for enhanced aesthetics.



Project Name:

Project Location:

Fixture Type:

SKUs:




Features & Benefits

- World's strongest illuminated hanger bar
- Available in continuous lengths up to 8 ft.
- Innovative mounting system for easy installation and screw-free finish
- Fixed and adjustable supports are available
- Available in two unique finishes to match your decor
- Superior color rendering
- High R9 and R13 values
- 2-step MacAdam ellipse for unparalleled quality and consistency
- UL Listed and Title 24

Dimensions Not actual size shown.

Fixture Cross Section

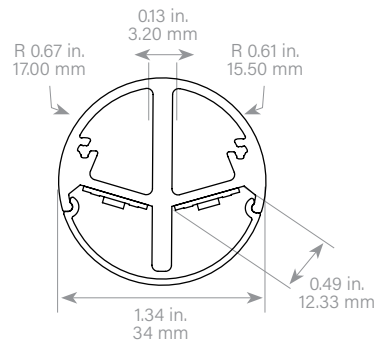

System Builder Choose one option for each step.

Company	Category	Model	Location	1 Output	2 CCT	Lens	3 Finish	4 Mounting	5 Length	6A Number of Leads	6B End Length	6C Beginning Length
OP	CLO	ARMA	I	-	-	FRT	-	-	-	-	-	-


1 Output	2 CCT	3 Finish	4 Mounting	5 Length	6 Lead
L2 167 lm/ft* L4 377 lm/ft* L6 587 lm/ft* L8 792 lm/ft* L12 1,205 lm/ft*	2200K 2400K 2700K - Quick Ship 3000K - Quick Ship 3500K - Quick Ship 4000K 5000K	 PAL - Quick Ship Polished Aluminum ABL - Quick Ship Anodized Matte Black	FSUPX Fixed Support VSUPX Variable Hanging Support NSUP No Supports	Inches 1/8 inches Inches 1-96 1 in. increments between 1 in. and 96 in. 1/8 Inches 125 1/8 in. 250 1/4 in. 375 3/8 in. 500 1/2 in. 625 5/8 in. 750 3/4 in. 875 7/8 in. 000 N/A	6A Number of Leads 1LEAD One lead 2LEAD Two leads (one at each end) 6B Length at End (in inches) 1-120 6C Length at Beginning (in inches) 1-120 - Optional - The length will dictate the wire gauge






* This is for a 3500K tape light

Quick Ship= Shipped within 10 business days







Armadio Nano Linear Fixture

Specification Submittal




 **Accessories** Screws are included in the mounting kits.

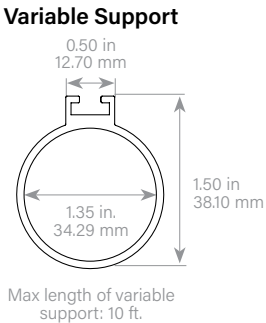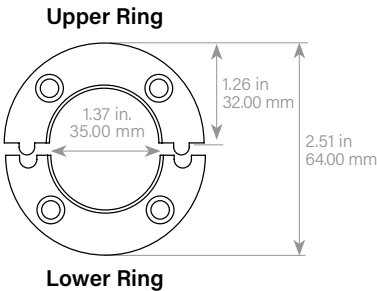

Variable Support Components

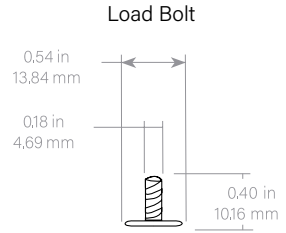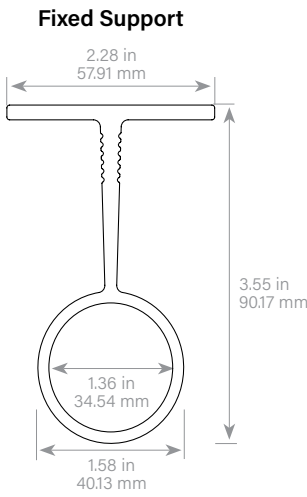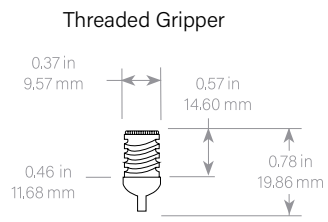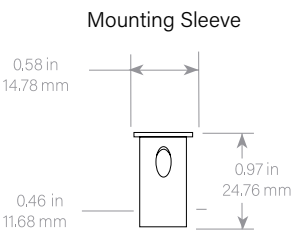

Assembled Fixture Using Variable Support

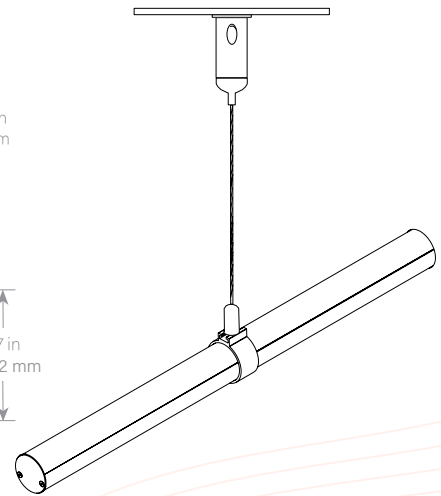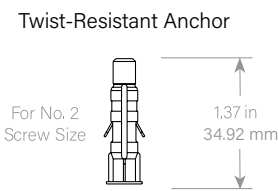

Armadio Nano Linear Fixture

Specification Submittal

Power Supplies

Yes, Include Power Supplies:

Optique Lighting will provide a universal power supply supporting 0-10, 1-10V, MLV, ELV dimming and voltage input from 100V-277V. Includes integrated junction box.

No Power Supplies Required:

No power supplies will be included.

*Note: If nothing is selected, we will assume power supplies should be included.

Output

L-Level	L2	L4	L6	L8	L12	
Lumens (per ft)	2200K	142	305	434	643	1037
	2400K	145	308	482	652	977
	2700K	172	366	572	775	1175
	3000K	169	355	556	751	1134
	3500K	167	377	587	792	1205
	4000K	182	380	588	747	1207
	5000K	186	389	596	813	1221
Wattage* (per ft.)	2.0	4.0	6.2	8.6	13.2	
Max Run Length** (ft.)	68	42	30	22	14	
Closet Rated	✓	✓	✓	✓	✓	

*Power consumption based on average wattage per foot.

**Maximum run length per power feed.

Armadio Nano Linear Fixture

Specification Submittal

◆ Photometry

1 ft., 3000K Armadio Nano Linear Fixture

LUMEN SUMMARY


Zone	Lumens	% Fixture
0° - 15°	100 lm	4.41%
0° - 30°	373 lm	16.50%
0° - 45°	745 lm	33.38%
0° - 60°	1127 lm	51.84%
0° - 75°	1448 lm	68.96%
0° - 90°	1669 lm	82.74%

FOOT CANDLES

Distance	Foot Candles
1'	477 fcd
1.5'	212 fcd
2'	119 fcd
2.5'	76 fcd
3'	53 fcd
4'	30 fcd
5'	19 fcd
6'	13 fcd
9'	6 fcd
12'	3 fcd


COLOR VECTOR GRAPHIC

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	96	0%	0%
2	97	1%	0%
3	95	1%	2%
4	96	0%	0%
5	95	2%	2%
6	92	5%	1%
7	95	3%	0%
8	94	3%	-2%
9	96	2%	0%
10	97	1%	1%
11	94	2%	3%
12	91	5%	-1%
13	92	3%	-5%
14	91	4%	-5%
15	95	1%	-1%
16	89	2%	-8%



□ Reference ■ Test

ANGULAR DISTRIBUTION 0 - 90°

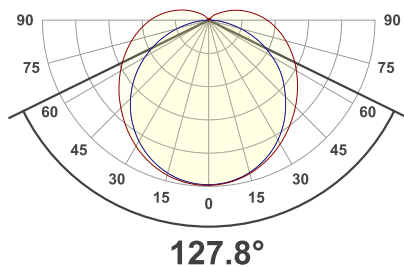

BEAM ANGLE

